



RageTurf dBTile



RageTurf dBTile (decibel) features a dense, textured polyethylene surface layer factory fusion bonded to a molded vulcanized composition rubber base. While too abrasive to fall or dive on, this consistent and tight surface is ideal for all footwork drills and can be used with Performance dBTile. This 2-foot by 2-foot by 2.5-inch molded tile is designed for areas where extreme durability and ultimate sound and shock absorption are required. RageTurf dBTile mitigates the shock and sound resulting from weights being released onto its surface by absorbing impact.

MARKETS

- Fitness
- Student Rec
- Sports

APPLICATIONS

- Functional Training
- Free Weights
- Therapy / Rehab


BENEFITS


- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant
- Easy installation with Quad Blok installation system


PRODUCT INFORMATION


Nominal Dimensions:

Available as a standard in molded tiles. Talk to your local agent to determine availability, pricing, minimums, and lead times.

 2.5" (63.5mm) x 24" (.61m) x 24" (.61m)



 ADA Ramp:
64" (1625mm) x 30" (762mm)
Thickness: 2.5" (63.5mm)

 Reducers:
8" (203mm) x 48" (1.22m)
Thickness: 2.5" (63.5mm)

 Quad Blok:
17" H x 8" x 8"
Adhesive = 1 Tube / 10 Quad Bloks

Color Options:
[Click here to view colors](#)

THE NRG FACTOR

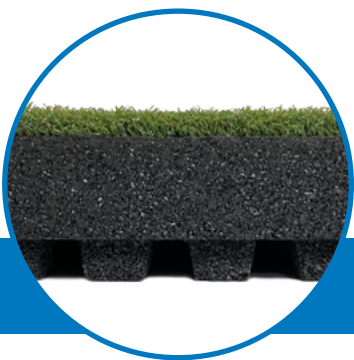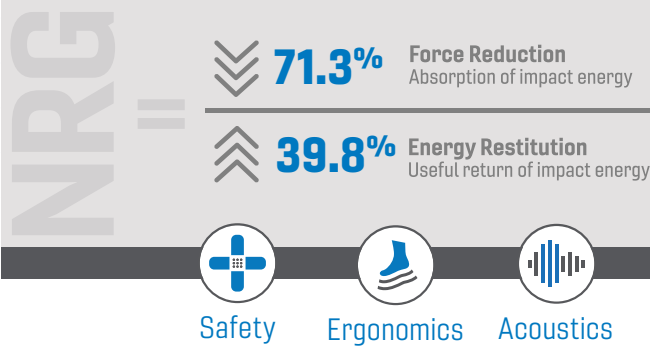

TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Force Reduction	Deltec	71.3%
Energy Restitution	Deltec	39.8%
Vertical Deformation	Deltec	8.5mm
G-Max	Clegg	43
Tufted Pile Height		.47"
Pill Test / Flammability	ASTM D2859	Pass
Coefficient of Friction	ASTM D2047	0.87 (dry)